

AquaSorb® 2000

granular coal based
activated carbon

Features and Benefits

- High volume activity
- Readily wetted
- Water washed
- Low dust
- High hardness
- Good abrasion resistance
- High organics compound capacity
- Enhanced transport pore structure
- Proven high reactivation yields

Typical Applications

- Treatment of municipal drinking water
- Production of soft drinks and beer
- Treatment of residential water
- Adsorption of taste and odor
- Protection of ion exchange resins

Available Particle Sizes

- 20x50 mesh (0.30 - 0.85 mm)
- 12x40 mesh (0.425 - 1.70 mm)
- 8x30 mesh (0.60 - 2.36 mm)
- 8x16 mesh (1.18 - 2.36 mm)
- 6x12 mesh (1.70 - 3.35 mm)

Certifications and Approvals

- ANSI / NSF standard 61
- AWWA B604-96
- EN12915
- Food and water codex


Standard Packaging

- 25 kg bag (55 lb)
- 500 kg bulk bag (1100 lb)



The polyethylene valve bag from Jacobi sets the standard in the industry for clean, durable and safe handling.

AquaSorb® 2000 is a high activity granular activated carbon manufactured by steam activation from select grades of bituminous coal. The perfect balance between adsorption and transport pores provides optimum performance in a wide range of water treatment applications. The product is a high density adsorbent and provides maximum volume activity. The material is water washed during manufacture and therefore wets rapidly. The excellent hardness and mechanical strength ensures negligible losses during backwashing, air scouring and multiple reactivations.

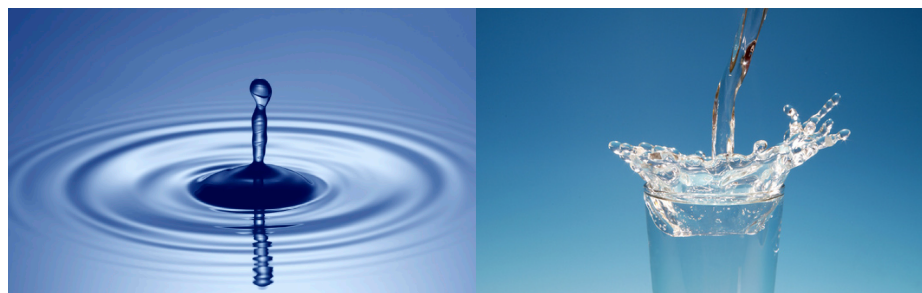

Soft drink manufacturers and breweries rely upon AquaSorb® activated carbon for dechlorination and dissolved organic removal.

Specification

Iodine number	min. 1000 mg/g
Moisture content	max. 5%
Total ash content	max. 13%
Wettability	min. 95%
Hardness	min. 95%

Typical Properties

Surface area	1050 m ² /g
Methylene blue number	280 mg/g
Total pore volume	1.04 cm ³ /g
Water soluble ash	0.2%
Apparent density	450 kg/m ³
pH	8-11

Jacobi Carbons reserves the right to modify specifications without prior notice. To obtain a full sales specification with test methods, please contact your nearest Jacobi Carbons office.

CORPORATE OFFICE

Sweden

Jacobi Carbons AB
Bredbandet 1, Varvsholmen
SE-392 30 Kalmar

Tel: +46 480 417550
Fax: +46 480 417559
info@jacobi.net
www.jacobi.net

SALES OFFICES

Germany

Jacobi Carbons GmbH
Feldbergstrasse 21
D-60323 Frankfurt/Main

Tel +49 69 719107-0
Fax +49 69 719107-20
infode@jacobi.net

United States

Jacobi Carbons, Inc.
1518 Walnut Street, 18th Floor
Philadelphia, PA 19102

Tel: [215] 546-3900
Fax: [215] 546-9921
infous@jacobi.net

United Kingdom

Jacobi Carbons Ltd.
Croft Court, Moss Estate
Leigh, Lancs, WN7 3PT

Tel: +44 1942 670 600
Fax +44 1942 670 605
infouk@jacobi.net

Malaysia

Jacobi Carbons (Asia) Sdn Bhd
1-04-18, Krystal Point Corporate Park
Jalan Tun Dr. Awang
11900 Bayan Lepas, Penang

Tel: +60 4 643 9828
Fax: +60 4 644 3928
infoasia@jacobi.net



Jacobi

THE CARBON COMPANY

SALES OFFICES (cont.)

Finland

Jacobi Carbons AB (SS)
Ruoholahdenkatu 8
SF-00180 Helsinki

Tel: +358 9 643602
Fax: +358 9 642900
infofin@jacobi.net

Switzerland

Jacobi Carbons AG
Rheinweg 5
CH-8200 Schaffhausen

Tel: +41 52 647 30 00
Fax: +41 52 647 30 09
infoch@jacobi.net



Certified to ANSI/NSF Std. 61



Polyethylene valve bags of
25 kg (55 lb) net weight on
500 kg (1100 lb) pallets



Polypropylene liner-free
FIBCs (super sacks) of
500 kg (1100 lb) net weight

CAUTION Activated carbon is a strong oxidizing agent and can remove oxygen from air under wet or humid conditions. Care should be taken when entering confined spaces where wet activated carbon is present. Ensure the use of correct breathing apparatus. Material Safety Data Sheets should be consulted for further details on procedures in the event of contact with activated carbon.

NOTICE Due to the progressive nature of Jacobi Carbons Group and the continually improving design and performance of our products, we reserve the right to change product specifications without prior notification. The information contained in this datasheet is intended to assist a customer in the evaluation and selection of products supplied by Jacobi Carbons. The customer is responsible for determining whether products and the information contained in this document are appropriate for customer's use. Jacobi Carbons assumes no obligation or liability for the usage of the information in this datasheet, no guarantees or warranties, expressed or implied, are provided. Jacobi Carbons disclaims responsibility and the user must accept full responsibility for performance of systems based on this data.



WORLDWIDE DISTRIBUTORS A diverse network of agents, strategically located around the world. Please contact any Jacobi Carbons office to locate your nearest distributor. AquaSorb®, EcoSorb®, GoldSorb®, ColorSorb®, DioxSorb®, AddSorb® and Jacobi are registered trademarks of Jacobi Carbons.
© Jacobi Carbons, 2007.